



Accessories


Track mounted socket PF083A-E (conforming to DIN EN 50022)

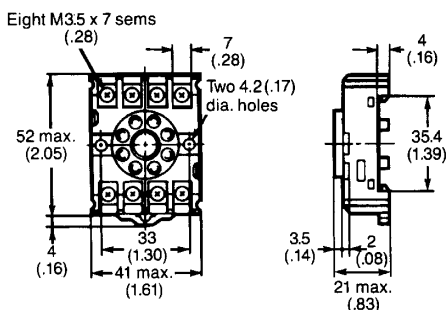


Terminal arrangement



Mounting holes




Mounting dimensions of relay with socket




Note: Model PF083A-E can be used as a front connecting socket.


Track mounted socket PF113A-E (conforming to DIN EN 50022)

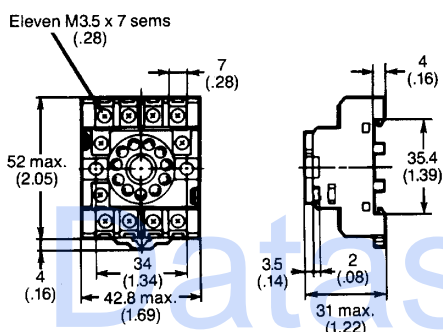


Terminal arrangement



Mounting holes




Mounting dimensions of relay with socket




Note: Model PF113A-E can be used as a front connecting socket.

Back connecting socket MK2 sockets (8 pin)

PL08 (UL File No. E87929)
Solder terminals

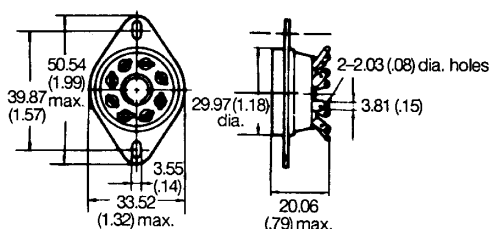


PL08-Q
Wire wrap terminals

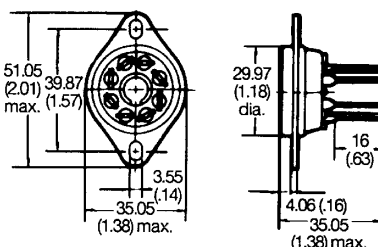


Printed circuit board socket

PLE08-0




Mounting holes PL08



Mounting holes and panel cut-out applies to PL08 and PL08-Q

PL08 type sockets and MK2 relay Total height dimension

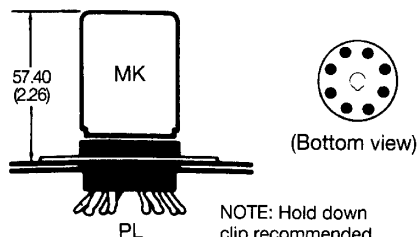

Recommended PCB layout PLE08-0

