

Graphic Memory

Datasheet.Cloud

Product Guide

SAMSUNG ELECTRONICS RESERVES THE RIGHT TO CHANGE PRODUCTS, INFORMATION AND SPECIFICATIONS WITHOUT NOTICE.

Products and specifications discussed herein are for reference purposes only. All information discussed herein is provided on an "AS IS" basis, without warranties of any kind.

This document and all information discussed herein remain the sole and exclusive property of Samsung Electronics. No license of any patent, copyright, mask work, trademark or any other intellectual property right is granted by one party to the other party under this document, by implication, estoppel or otherwise.


Samsung products are not intended for use in life support, critical care, medical, safety equipment, or similar applications where product failure could result in loss of life or personal or physical harm, or any military or defense application, or any governmental procurement to which special terms or provisions may apply.

For updates or additional information about Samsung products, contact your nearest Samsung office.

All brand names, trademarks and registered trademarks belong to their respective owners.

© 2012 Samsung Electronics Co., Ltd. All rights reserved.

1. GRAPHIC MEMORY ORDERING INFORMATION

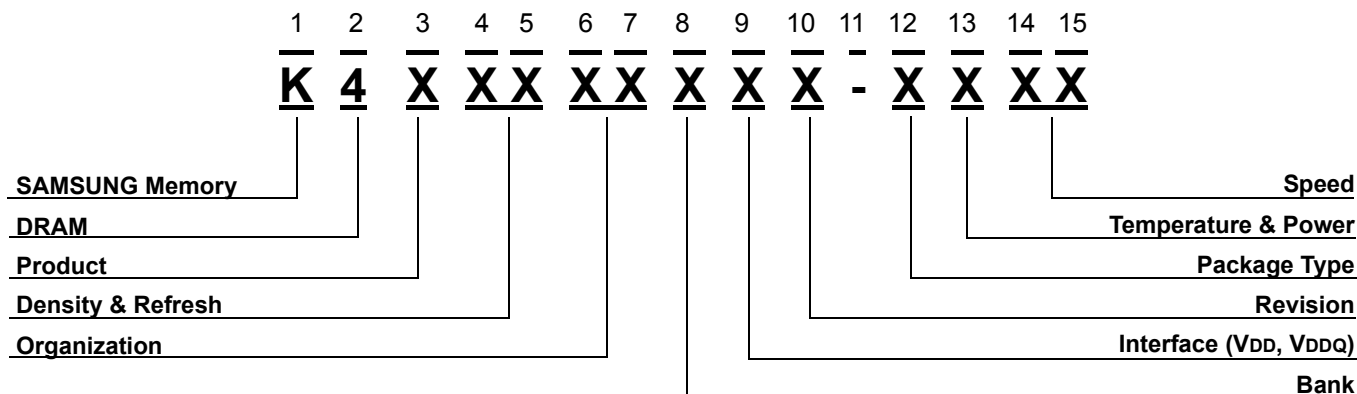

1. SAMSUNG Memory

2. DRAM

3. Product

- W : gDDR3 SDRAM
- J : GDDR3 SGRAM
- G : GDDR5 SGRAM

4~5. Density & Refresh

- 51 : 512M, 8K/64ms
- 52 : 512M, 8K/32ms
- 10 : 1G, 8K/32ms
- 20 : 2G, 16K/32ms
- 1G : 1G, 8K/64ms
- 2G : 2G, 8K/64ms
- 4G : 4G, 8K/64ms
- 41 : 4G, 16K/32ms

6~7. Organization

- 16 : x16
- 32 : x32

8. Bank

- 3 : 4Banks
- 4 : 8Banks
- 5 : 16Banks

9. Interface (VDD, VDDQ)

- 6 : SSTL_15 (1.5V,1.5V)
- F : POD_15 (1.5V,1.5V)
- K : POD_18 (1.8V,1.8V)

10. Revision

- M : 1st Gen.
- B : 3rd Gen.
- D : 5th Gen.
- F : 7th Gen.
- H : 9th Gen.
- Q : 17th Gen.
- A : 2nd Gen.
- C : 4th Gen.
- E : 6th Gen.
- G : 8th Gen.
- I : 10th Gen.
- Z : 26th Gen.

11. "-"

12. Package Type

- gDDR3
- E : 100FBGA(Halogen Free & Lead Free)
- H : 96FBGA(Halogen Free & Lead Free)
- B : 96FBGA(Halogen Free & Lead Free & Flip-Chip)
- G : 78FBGA(Halogen Free & Lead Free)
- V : 78FBGA(Halogen Free & Lead Free & Flip-Chip)

- GDDR3
- B : 136FBGA(Lead Free)
- H : 136FBGA(Halogen Free & Lead Free)

- GDDR5
- H : 170FBGA(Halogen Free & Lead Free & Flip-Chip)
- F : 170FBGA(Halogen Free & Lead Free)

13. Temperature & Power(VDD)

- C : Commercial Normal
- J : Commercial High
- L : Commercial Low
- Y : Commercial Low Voltage

14~15. Speed

- | | |
|-------------------------|------------------------|
| 1B : 0.83ns (2400Mbps) | 25 : 0.25ns (8000Mbps) |
| 1A : 1.0ns (2133Mbps) | 28 : 0.28ns (7000Mbps) |
| 11 : 1.07ns (1866Mbps) | 03 : 0.33ns (6000Mbps) |
| 12 : 1.25ns (1600Mbps) | 04 : 0.40ns (5000Mbps) |
| 14 : 1.4ns (1400Mbps) | 05 : 0.50ns (4000Mbps) |
| 15 : 1.5ns (1333Mbps) | 5C : 0.56ns (3600Mbps) |
| 16 : 1.6ns (1200Mbps) | 06 : 0.62ns (3200Mbps) |
| 18 : 1.8ns (1100Mbps) | 6A : 0.66ns (3000Mbps) |
| 19 : 1.875ns (1066Mbps) | 07 : 0.71ns (2800Mbps) |
| 20 : 2.0ns (1000Mbps) | 7A : 0.77ns (2600Mbps) |
| 22 : 2.2ns (900Mbps) | 09 : 0.9ns (2200Mbps) |



2. GRAPHIC MEMORY COMPONENT PRODUCT GUIDES

Product	Density	Banks	Part Num.	PKG & Speed	Org.	Interf.	Ref.	Voltage(V)	PKG.	Status
gDDR3 SDRAM	1Gb G-die	8Banks	K4W1G1646G	BC08/1A 11/12/15	64Mx16	SSTL_15	8K/64ms	1.5V ± 0.075V	96ball FBGA	Mass Production
	2Gb C-die		K4W2G1646C	HC1A/11 12/15	128Mx16					Mass Production
	2Gb E-die		K4W2G1646E	BC1A/11 12/15						Mass Production
	4Gb B-die		K4W4G1646B	HC 1A/11/12	256Mx16					Mass Production
GDDR3 SGRAM	1Gb G-die	8Banks	K4J10324KG	HC1A/14	32Mx32	POD_18	8K/32ms	1.8V ± 0.1V	136ball FBGA	Mass Production
GDDR5 SGRAM	1Gb G-die	16Banks	K4G10325FG	HC03/04/05	32Mx32	POD_15	8K/32ms	1.5V ± 0.045V	170ball FBGA	Mass Production
	2Gb D-die		K4G20325FD	FC28/03/04	64Mx32	POD_15	16K/32ms	1.5V ± 0.045V		Mass Production
	4Gb C-die		K4G41325FC	HC28/03/04	128Mx32	POD_15	16K/32ms	1.5V ± 0.045V		ES Sep.'12